

BEAMER 6




LCG-1212S

BEAMER6 V2 is powered by 12 hex-color RGBAW+uV LEDs. The new connectors IP65 Seetronic. It is for architectural and stage lighting and can be used for both interior and exterior applications



Light source

- 12*12W 6 in 1 RGBAW+ uV Hex led
- Sources life: up to 50 000 hours
- Flicker free operation 1500 Hz
- Beam angle 25 degree
- Output intensity: 1615 lux @ 3m
- Color Temperature: 6000-7000k

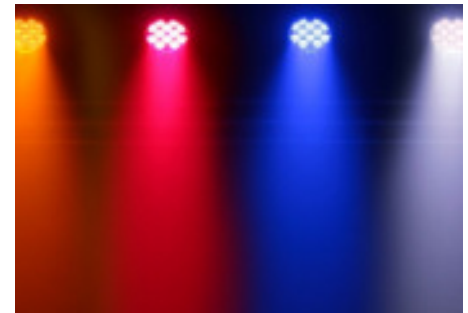

Features

- 4-button, DMX digital display on rear panel
- Operating Modes: Standalone, Master/Slave
- Sound Active, Color Preset
- 5 user-selectable 32-bit dimming curves
- Variable electronic dimming & strobe
- Built-in color & chase macros via DMX
- Built-in automated programs via master/slave
- Built-in sound active programs DMX 512 protocol
- DMX channel mode: 4,5,6,7,9,12 Channel



Control

- 4-button, DMX digital display on rear panel
- Automatic lock key

Connections

- Outdoor powerCON® compatible AC power In/Out
- 3-pin male input and 3-pin female output

Electronic

- AC 100 to 264 Volts, 50/60Hz
- Power: 144w Watt max
- Convection cooled cast aluminum housing

Certifications

- IP65 protection index
- cETL

Dimensions

- Size: 10.6"Lx 6.5"Wx11"H (270x166x283mm)
- Weight: 11lbs (5.2 Kg)

