

BEAMER Z

LCG-2007



Optics

- Motorized silent zoom: 8° to 50 °
- Optical lens: High-efficiency 42mm PMMA secondary optics and lens tube
- 87% optic efficiency

Light source

- 7 *20W 4 in 1 RGBW, quad led.
- Rated Sources life: up to 50.000 hours
- Flicker free sources Management, convenient for TV applications and all video recorded events
- Output intensity: 27700 lux @ 2m 8 degree; 1380 lux @ 2m 50 degree

Electronic

- Electronic power supply with active PFC
- AC 100 to 250 Volts, 50/60Hz
- Power: 150 Watt max
- Smart temperature protection

Control

- DMX 512 protocol, through 3 or 5 pins male/female IP65 waterproof lockable multifunction connector
- DMX channel mode: 2,4,8,17 & 19 CH

Hardware facilities


- TFT displayer for address and special functions settings, with flip function
- 4 menu buttons to set the functions
- Over temperature protection
- Powercon True 1 in / out for Power supply
- Natural cooling without fan

Software

- Easy operate menu and nice screen
- DMX channel mode: 2,4,8,12&14CH
- 51 static color macros
- 10 internal programs and 10 customer programs
- 11 kinds of color temperature white
- Information menu including hour counter, temperature, software version
- Maximum 66 ID seting for easy separate control



Housing

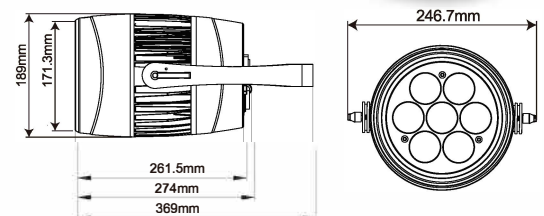

- Body in die-cast aluminum
- Sides in die-cast aluminium
- Front window in tempered glass
- Control Panel in PMMA glasses
- IP65 protection index
- Size: 254(L)x192(W)x318(H)mm
- Weight: 5 kg