



JOLT PANEL FX



LED Wash/Strobe/Blinder

The ADJ Jolt Panel FX is an innovative multi-use strobe / eye candy fixture. It is equipped with 800 0.3W RGB SMD LED for color strobing and eye candy effects, and 48 5W white SMD LED located in the center of fixture to create the traditional look of a strobe. Zone chasing control provides an eye candy effect when used together with the white LEDs. The Jolt Panel FX's massive light output is specifically designed for large stages, nightclubs, live events and touring.

The rear panel has conveniently located connections 5-pin DMX in/out connections along with locking power in/out to daisy chain power. There is also a USB input that allows users a fast and convenient way to update firmware. There are also holes to connect an omega bracket to the Jolt Panel FX.

The Jolt Panel FX offers users an easy way to navigate the built-in features from a LCD display with a 4-button menu system. The display allows users to change dimming modes, dimming speed, programs, color macros, LED refresh rate, gamma settings and DMX channel modes.

A scissor yoke, and an omega bracket come with the fixture so the it can be attached to a clamp and hung on truss.

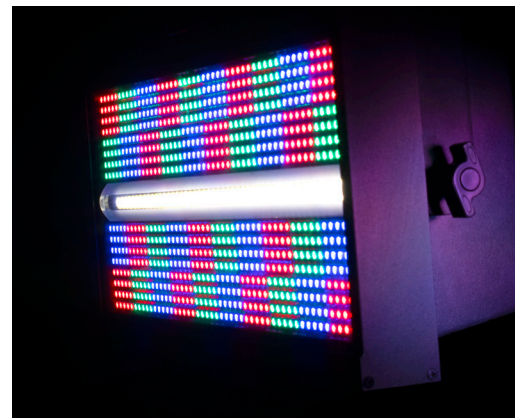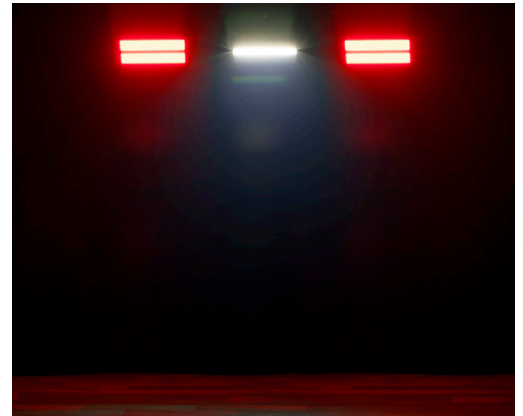

JOLT PANEL FX



Light Source:

- 800 x 0.3W RGB SMD LEDs + 48 x 5W Cool White SMD LEDs
- RGB LEDs: 121 Degree Beam Angle
- Cool White LEDs: 89 Degree Beam Angle
- Color Temperature: Red: 620-630nm. Green: 515-525nm. Blue: 460-470nm. / Cool White: 6500-7000K
- 50,000 Hour Average LED Life

Features:

- 40 x RGB LED zones
- 6 x Cool White LED zones
- 25 built-in RGB LED Program Macros
- 9 built-in Cool White LED Program Macros

Control:

- Control Protocol: DMX
- 8 DMX Modes: 6, 9, 13, 18, 36, 41, 126 and 141 channels
- Dim Modes: 6 Presets (Standard, Stage, TV, Architectural, Theatre & Stage 2)
- Dim Speed control (0.1~10 Seconds)
- 0-100% Smooth Dimming
- Strobe, shutter & pulse control
- Max Strobe Rate 25Hz. Min Strobe Rate: 0.35Hz.
- Adjustable LED Refresh Rates (900~25kHz)
- With Wired Digital Communication Network
- Display: LCD display with 4-button touch menu

Connections:

- Data: 5-pin DMX In/Out
- 180 degree mounting bracket system
- Ready for Omega Bracket
- Power locking power in/out

Electrical:

- 100-240V 50Hz/60Hz (Auto Sensing)
- Max Power Consumption: 300W
(2.7A@120V~60Hz, 1.4A@230V~50Hz)

Dimensions / Weight:

- Length: 6.3" (159.5mm)
- Width: 15.95" (405mm)
- Height: 9.85" (250.5mm)
- Weight: 13.2 lbs. (6kg)

What's Included:

- 1x Power locking power cable
- 1x Omega Bracket
- 1x Single Yoke

